

The introduction of EON Technology™ further extends the technical leadership of SuperSafe™ SBS batteries: not only do the SuperSafe SBS B14 - 190F monoblocs and SBS 410 cell retain the benefits typically associated with EnerSys® Thin Plate Pure Lead technology (long life, high energy density, superior shelf life, etc.), they now also deliver exceptional cyclic performance in both float and fast charge applications, even in the hottest and harshest operating environments.

Where conventional VRLA AGM batteries struggle to cope with harsh conditions, remote locations and frequent power outages, the combination of EON and TPPL technologies makes SuperSafe SBS 2V and 12V batteries the perfect solution for the challenging operating conditions of today's telecommunication networks.

With the introduction of the SBS 410 cell, the SuperSafe SBS EON Technology battery range is now available in two configurations: the front terminal design that allows for maximum back-up power within a given cabinet installation, and the top terminal design typically used for open rack installations.

For power, performance and reliability, there is no substitute to SuperSafe SBS EON Technology batteries.

BATTERY RANGE SUMMARY

Features & Benefits

- Capacity Range: 62 - 410Ah
- Superior cyclic performance and endurance
- High energy density
- Exceptional fast charge acceptance ability
- Long design life
- Resilient to harsh environments
- Up to two year shelf life



EnerSys[®]

Power/Full Solutions

RESERVE
POWER

Construction

- Positive plates - pure lead grids manufactured using a unique process
- Negative plates - provide perfect balance with the positive plates to ensure optimum recombination efficiency
- Separators - superior quality microporous glass mat separator with high absorption and stability
- Containers and lids - UL94 V-0 rated flame retardant ABS material, highly resistant to shock and vibration
- Electrolyte - high grade dilute sulphuric acid absorbed into separator material
- Terminal design - leak resistant patented dual seal terminal design
- Self-regulating pressure relief valves - prevent ingress of atmospheric oxygen

- Flame arrestors - built into each bloc for increased operational safety

Installation and Operation

- SuperSafe™ SBS batteries are designed for use in cabinets or on stands, close to the point of use. A separate battery room is not required
- SuperSafe SBS EON Technology™ models can be mounted in any orientation except inverted
- Designed for operation in traditional float applications or cyclic/hybrid applications
- Up to two year shelf life
- Low maintenance: no water addition required
- Wide operating temperature range: -40°C to + 50°C

Standards

- Designed to be compliant with international standard IEC 60896/21 & 22
- Classified as "Long Life" according to Eurobat guide 1999
- Conforms to Telcordia® SR-4228
- Recognised by UL (UL Standard 1989)
- Approved as non-hazardous cargo for ground, sea and air transportation in accordance with US DOT Regulation 49 and ICAO & IATA Packing Instruction 806
- Manufactured in EnerSys® ISO™ 9001:2000 and ISO 14001:2004 certified production facilities


General Specifications

Battery Type	Nominal Capacity (Ah)			Nominal Dimensions						Typical Weight		Short Circuit Current (A) ⁽¹⁾	Internal Resistance (mΩ) ⁽¹⁾	Terminals
	Nominal Voltage (V)	10 hr rate to 1.80Vpc @ 20°C	8 hr rate to 1.75Vpc @ 77°F	Length		Width		Height		kg	lbs			
				mm	in	mm	in	mm	in					
SBS B14	12	62	62	280	11.0	97	3.8	264	10.4	19.1	42.0	1800	7.0	M8 F
SBS B14F	12	62	62	303	11.9	97	3.8	264	10.4	19.1	42.0	1800	7.0	M6 M
SBS C11 ⁽²⁾	12	92	91	395	15.6	105	4.1	264	10.4	28.0	61.6	2300	5.5	M8 F
SBS C11F ⁽²⁾	12	92	91	417	16.4	105	4.1	256	10.1	28.0	61.6	2300	5.5	M6 M
SBS 100 ⁽²⁾	12	100	100	395	15.6	108	4.3	287	11.3	32.6	71.9	2210	5.6	M8 F
SBS 100F ⁽²⁾	12	100	100	395	15.6	108	4.3	287	11.3	32.6	71.9	2210	5.6	M6 M
SBS 112F ⁽²⁾	12	112	112	561	22.1	125	4.9	228	9.0	41.0	90.4	2500	5.0	M6 M
SBS 145F ⁽²⁾	12	145	145	455	17.9	173	6.8	238	9.4	47.6	105.0	4100	3.0	M6 M
SBS 170F ⁽²⁾	12	170	170	561	22.1	125	4.9	283	11.1	52.5	115.7	3400	4.0	M6 M
SBS 190F ⁽²⁾	12	190	190	561	22.1	125	4.9	316	12.4	60.0	132.3	3800	3.3	M6 M
SBS 410 ⁽²⁾	2	410	410	200	7.9	208	8.2	239	9.4	23.2	51.1	4725	1.3	M8 M

Notes:

⁽¹⁾ Figures obtained via IEC method.

⁽²⁾ With integral or rope handles.

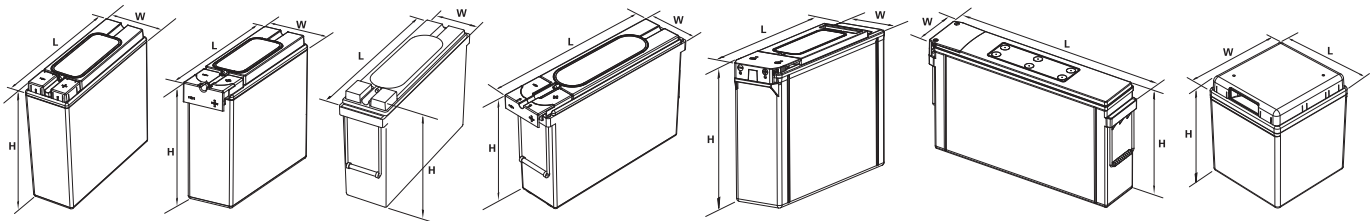

SBS B14

SBS B14F

SBS C11

SBS C11F & 145F

SBS 100 & 100F

SBS 112F, 170F & 190F

SBS 410



www.enersys.com

EnerSys
 P.O. Box 14145
 Reading, PA 19612-4145
 USA
 Tel: +1-610-208-1991
 +1-800-538-3627
 Fax: +1-610-372-8613

EnerSys Europe
 Löwenstrasse 32
 8001 Zurich,
 Switzerland

EnerSys Asia
 152 Beach Road
 Gateway East Building
 Level 11
 189721 Singapore
 Tel: +65 6508 1780

Contact:

© 2010 EnerSys. All rights reserved.
 Trademarks and logos are the property of EnerSys and its affiliates, except ISO™ and Telcordia®, which are not the property of EnerSys.